


# R. C. Tronics Incorporated

2573 East Kercher Road  
Goshen, Indiana 46528  
Toll Free 1-866-457-7790

**DAT-01348-11006**  
**08 Conductor Data Cable**  
Phone 1-574-642-3857  
Fax 1-574-642-3858  
<http://www.rctronics.com>

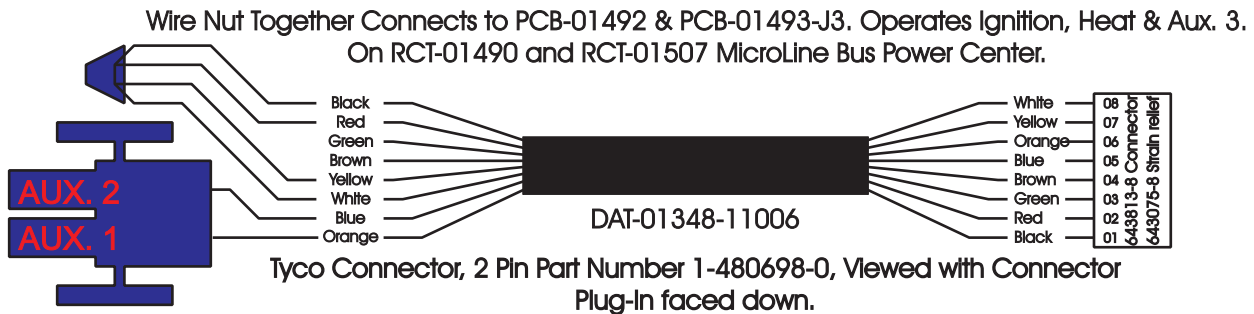

*Mate-N-Loc Connector operates relays 5A & 5B on RCT-00786 or RCT-01414,  
Bus Power Center from J3 on RCT-00948, Dash Switch Center.  
Black & Red Operates 7A & 7B when taken to an external ground.*

*Mate-N-Loc Connector operates relays Aux. 1 & Aux. 2, Wire Nut operates;  
Heat, Mirror and Aux. 3, all with "Ignition". on Microline Bus Power Centers,  
RCT-01490 or RCT-01507, from J3 on RCT-01492 Or RCT-01493, switch centers.*

Carol C-2465, 22 AWG, Stranded 7/30/8, unshielded eight conductor cable.  
Cut each jacket end 4 inches long, remove jacket on each end.  
Requires one (1) Tyco/Amp. 643814-8 connector & Tyco/Amp. 643075-8 end cap.  
Place connector into insertion equipment, start with #8 and complete with #1

Wire Nut the following wires together; Black, Red, Yellow & White

Add the following wires to Tyco Connector #1-480698-0; Blue and Orange.

#1 BLACK, #2 RED, #3 GREEN, #4 BROWN,

#5 BLUE, #6, ORANGE, #7 YELLOW, #8 WHITE

D  
A  
T

1st three Letters = Data Cable

0  
0  
0  
0  
0

2nd five numbers = Print Number

0  
0

3rd two numbers = Configuration

0  
0

4th two numbers = Length In Feet

0

5th last digit = Length In Inches