


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01349-08006
10 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

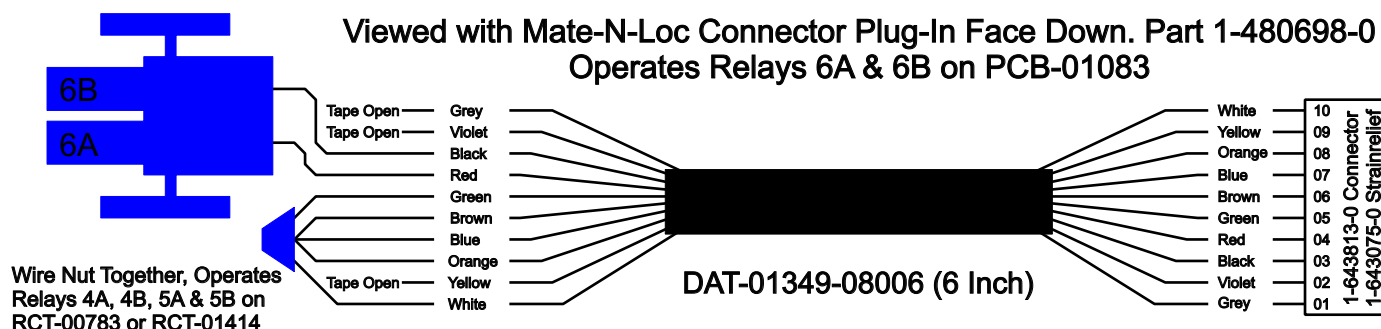

Mate-N-Loc connector operates relays 6A & 6B with "IGNITION, on RCT-00786 or RCT-01414 Bus Power Center. Connects to J4 on RCT-01083 Dash Switch Center.

Green, Brown, Blue, Orange and White Operates 4A, 4B, 5A and 5B with "IGNITION".

Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Ground nd shielded ten conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.

Place connector into insertion equipment, start with #10 and complete with #1

Wire Nut the following wires together; Green, Brown, Blue, Orange and White.

Add the following wires to Tyco Connector #1-480698-0; Black and Red.

#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN

#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE

D
A
T

1st three Letters = Data Cable

0
0
0
0
0

2nd five numbers = Print Number

0
0

3rd two numbers = Configuration

0
0

4th two numbers = Length In Feet

0

5th last digit = Length In Inches