


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

DAT-01349-16006 10 Conductor Data Cable

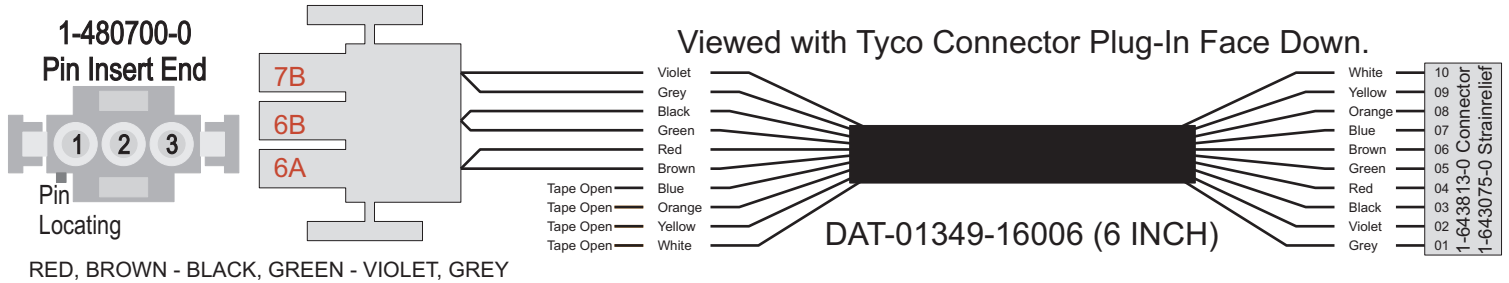

**Mate-N-Loc operates relays 7B, 7A - 6B, 5B- 6A, 5A on RCT-00786 or RCT-01414,
Bus Power Center connects to J4 on RCT-01083**

**Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd shielded ten conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.
Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.
Place connector into insertion equipment, start with #10 and complete with #1**

Wire Nut the following wires together; Blue, Orange, White.

Add the following wires to Tyco Connector #1-480698-0; Black and Red.

#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN

#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE

D
A 1st three Letters = Data Cable
T

0
0
0 2nd five numbers = Print Number
0
0

0 3rd two numbers = Configuration
0

0 4th two numbers = Length In Feet
0

0 5th last digit = Length In Inches