


R. C. Tronics Incorporated

**2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790**

**DAT-01350-04006
15 Conductor Data Cable**

**Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>**

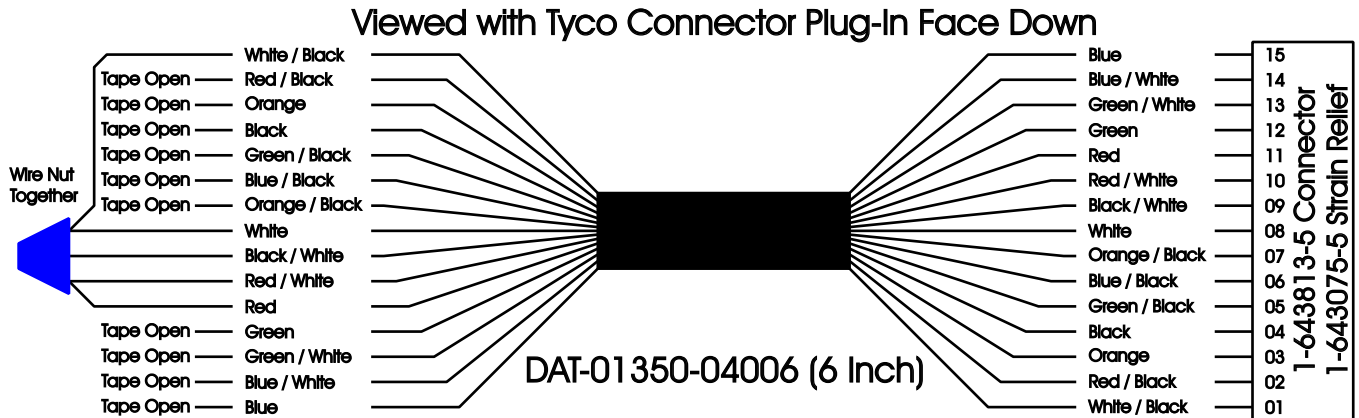

Connect to PCB-1067 or PCB-1068 operates 4/A, 4/B, 5/A, 5/B RCT-786 or RCT-1414, Bus Power Center

***Operates Relays; 4A, 4B, 5A and 5B with "IGNITION" on RCT-00786 or RCT-01414,
Bus Power Center. Connects to J3-PCB-01067 or J1-PCB-01068.***

Belden 8458 or Carol C-4073, 22 AWG, Stranded, unshielded fifteen conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires two (2) Tyco/Amp. 1-643814-5 connector & Tyco/Amp. 1-643075-5 end cap.

Place connector into insertion equipment, start with #15 and complete with #1

Wire Nut the following wires together; White/Black, White, Black/White, Red/White, Red.

**#1 WHIT/BLACK, #2 RED/BLACK, #3 ORANGE, #4 BLACK, #5 GREEN/BALCK
#6 BLUE/BLACK, #7 ORANGE/BLACK, #8 WHITE, #9 BLACK/WHITE, #10 RED/WHITE
#11 RED, #12 GREEN, #13 GREEN/WHITE, #14 BLUE/WHITE, #15 BLUE**

D	
A	1st three Letters = Data Cable
T	
0	
0	
0	2nd five numbers = Print Number
0	
0	
0	
0	3rd two numbers = Configuration
0	
0	
0	4th two numbers = Length In Feet
0	
0	5th last digit = Length In Inches