


# R. C. Tronics Incorporated

2573 East Kercher Road  
Goshen, Indiana 46528  
Toll Free 1-866-457-7790

Phone 1-574-642-3857  
Fax 1-574-642-3858  
http://www.rctronics.com

## DAT-01758-01XXX 13 Conductor Data Cable

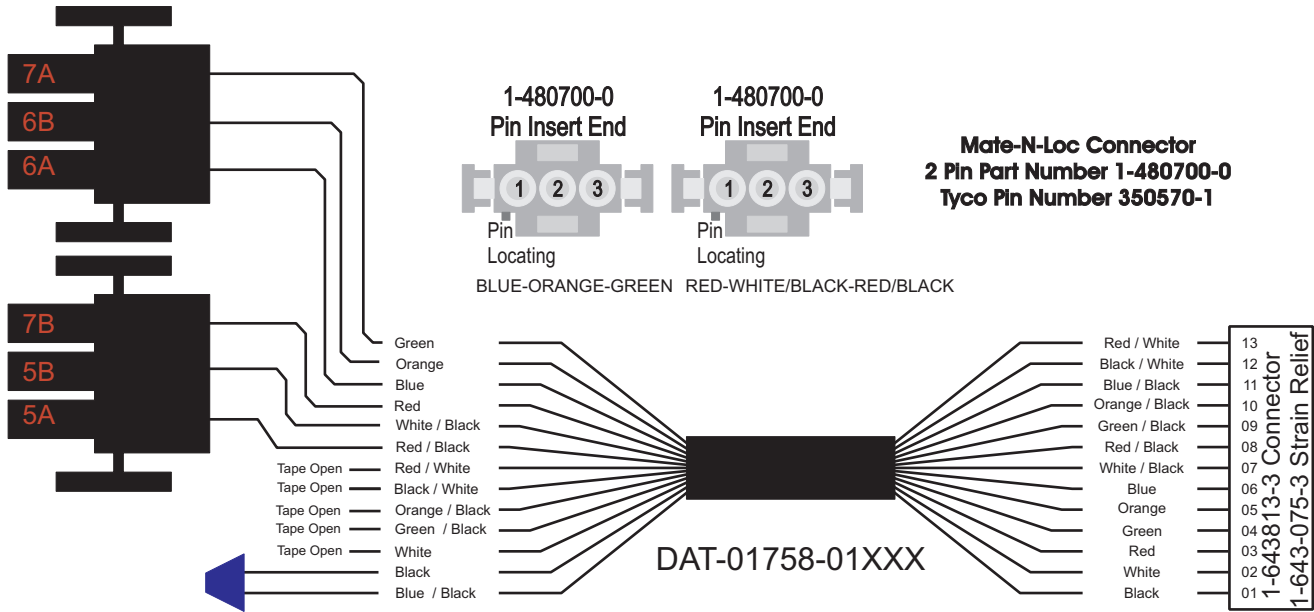

Viewed with Tyco Connector Plug-In Face-Down.

Mate-N-Loc 1 Operates relays 6A, 6B, & 7A with “IGNITION.”  
Mate-N-Loc 2 Operates relays 5A, 5B, & 7B with “IGNITION.”  
Connects to J4 on the RCT-02056 Switch Panel.

Belden 9541, 24 AWG, Stranded, unshielded fifteen conductor cable.  
Cut each jacket end 4 inches long, remove jacket on each end.  
Requires one (1) Tyco/Amp. 1-643814-3 connector & Tyco/Amp. 1-643075-3 end cap.  
Place connector into insertion equipment, start with #13 and complete with #01.

Wire Nut the following wires together; Black, Blue/Black.

### CHECK CABLE WITH CABLE CHECKER

#01 BLACK , #02 WHITE, #03 RED, #04 GREEN, #05 ORANGE  
#06 BLUE, #07 WHITE/BLACK, #08 RED/BLACK, #09 GREEN/BLACK,  
#10 ORANGE/BLACK #11 BLUE/BLACK, #12 BLACK/WHITE, #13 RED/WHITE.

D	
A	1st three Letters = Data Cable
T	
0	
0	
0	2nd five numbers = Print Number
0	
0	
0	3rd two numbers = Configuration
0	
0	4th two numbers = Length In Feet
0	
0	5th last digit = Length In Inches