
## R. C. Tronics Incorporated

2573 East Kercher Road Goshen, Indiana 46528 Toll Free 1-866-457-7790

ORANGE-BLUE-YELLOW

Phone 1-574-642-3857
Fax 1-574-642-3858
http://www.rctronics.com

DAT-01348-17006

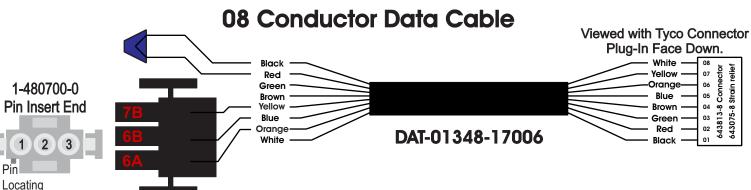

Mate-N-Loc Connector, 3 Pin Part Number 1-480700-0 (Flat Face Down)

Mate-N-Loc Connector Operates Aux. 1, Aux. 2 & Heat on RCT-01490 or RCT-01507 from J3 on RCT-01492 or RCT-01493. Black & Red Operates Aux.3 with "Ignition".

Carol C-2465, 22 AWG, Stranded 7/30/8, unshielded eight conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires one (1) Tyco/Amp. 643814-8 connector & Tyco/Amp. 643075-8 end cap.

Place connector into insertion equipment, start with #8 and complete with #1

Wire Nut the following wires together; Black and Red.

Add the following wires to Tyco Connector #1-480700-0; Blue, Orange and Yellow.

#1 BLACK, #2 RED, #3 GREEN, #4 BROWN,

#5 BLUE, #6, ORANGE, #7 YELLOW, #8 WHITE

D A T	1st three Letters = Data Cable
0 0 0 0	2nd five numbers = Print Number
0	3rd two numbers = Configuration
0	4th two numbers = Length In Feet
0	5th last digit = Length In Inches