


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01349-15006
10 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

Amp Maten-Loc , Part Number 1-480700-0
Flat Face Down, Red 6/A, Black 6/B & Violet 7/A.
Flat Face Down, Brown 5/A, Green 5/B & Grey 7/B.

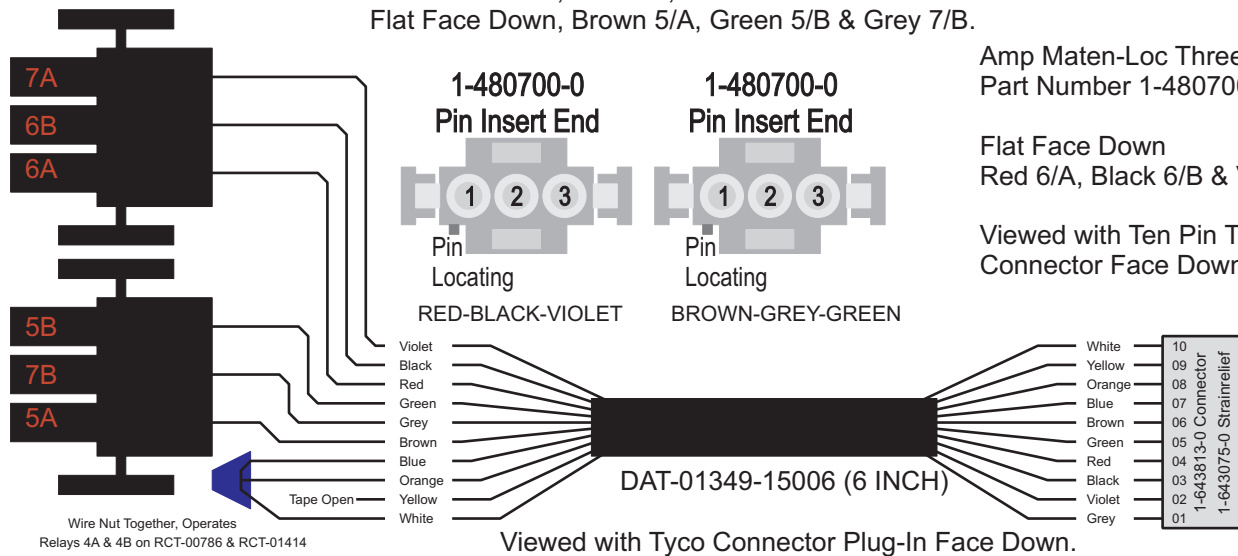

Amp Maten-Loc Three Pin
Part Number 1-480700-0.

Flat Face Down
Red 6/A, Black 6/B & Violet 7/B

Viewed with Ten Pin Tyco
Connector Face Down.

Mate-N-Loc's operates relays 6A, 6B, 7A & 5A, 5B, 7B with "IGNITION", on RCT-00786, RCT-01414 and RCT-01760, Bus Power Center's. Connects to J4 on RCT-01083, Dash Switch Center. Blue, Orange and White Operates 4A, 4B, with "IGNITION".

**Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd shielded ten conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.**

**Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.
Place connector into insertion equipment, start with #10 and complete with #1**

Wire Nut the following wires together; Blue, Orange, White.

Add the following wires to Tyco Connector #1-480698-0; Black and Red.

**#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN
#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE**

D
A
T

0
0
0
0
0

0
0

0
0

0
0
5th last digit = Length In Inches

1st three Letters = Data Cable
2nd five numbers = Print Number
3rd two numbers = Configuration
4th two numbers = Length In Feet