


# R. C. Tronics Incorporated

2573 East Kercher Road  
Goshen, Indiana 46528  
Toll Free 1-866-457-7790

Phone 1-574-642-3857  
Fax 1-574-642-3858  
<http://www.rctronics.com>

## DAT-01349-17006 10 Conductor Data Cable

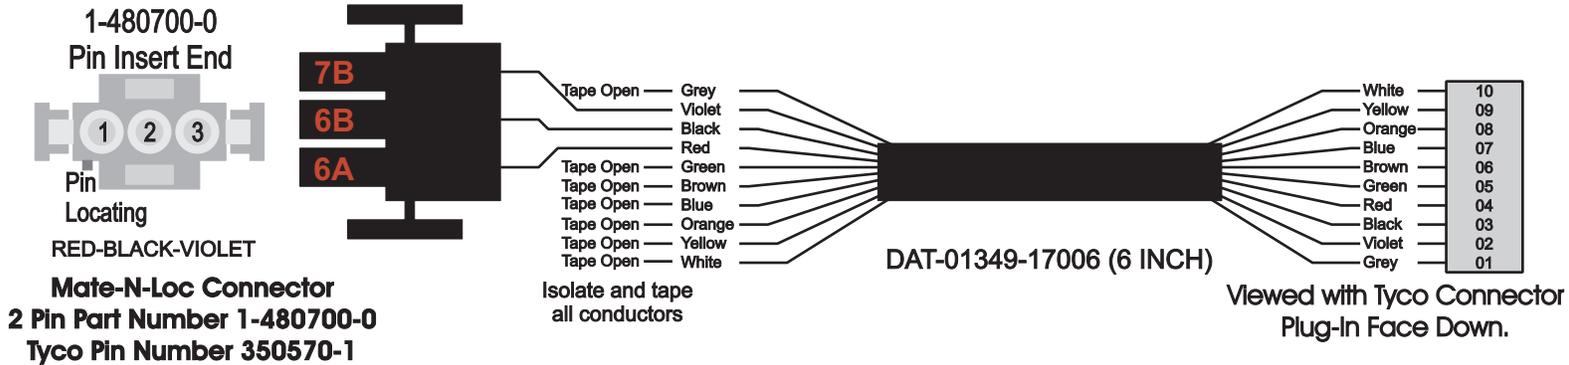

**Mate-N-Loc operates relays 6A, 6B & 7B with "IGNITION", on RCT-01760, Bus Power Center connects to J4 on RCT-01083, Dash Switch Center.**

**Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd shielded ten conductor cable.**

**Cut each jacket end 4 inches long, remove jacket on each end.**

**Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.**

**Place connector into insertion equipment, start with #10 and complete with #1**

**Add the following wires to Tyco Connector #1-480698-0; Black and Red.**

**#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN**

**#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE**

D  
A  
T  
  
0  
0  
0  
0  
0  
0  
  
0  
0  
  
0  
0  
  
0  
0

1st three Letters = Data Cable

2nd five numbers = Print Number

3rd two numbers = Configuration

4th two numbers = Length In Feet

5th last digit = Length In Inches