


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01350-02006
15 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

Viewed with Tyco Connector Plug-In Face Down

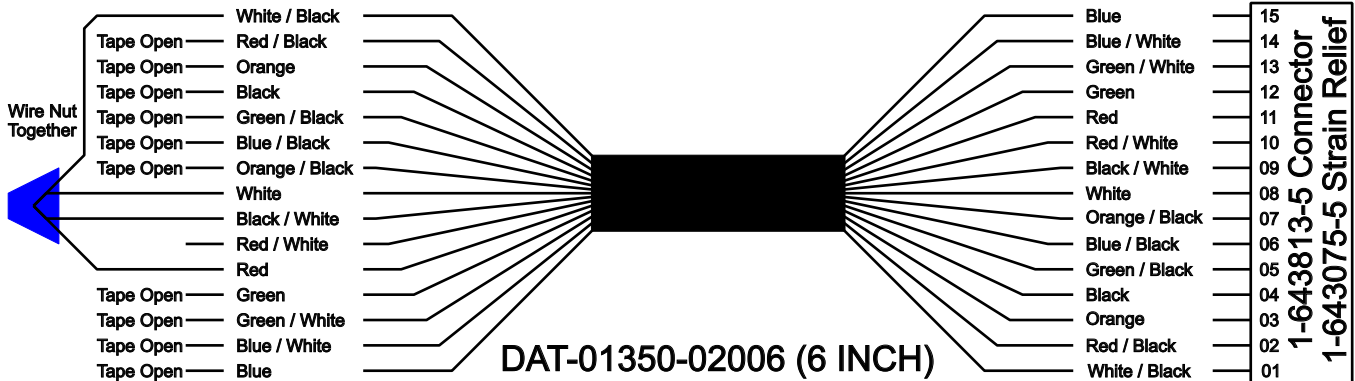

Operates Relays; 4A, 4B and 5B with "IGNITION" on RCT-00786 or RCT-01414, Bus Power Center. Connects to J3-PCB-01067 or J1-PCB-01068.

Belden 8458 or Carol C-4073, 22 AWG, Stranded, unshielded fifteen conductor cable. Cut each jacket end 4 inches long, remove jacket on each end. Requires two (2) Tyco/Amp. 1-643814-5 connector & Tyco/Amp. 1-643075-5 end cap. Place connector into insertion equipment, start with #15 and complete with #1

Wire Nut the following wires together; White/Black, White, Black/White, Red.

**#1 WHIT/BLACK, #2 RED/BLACK, #3 ORANGE, #4 BLACK, #5 GREEN/BALCK
#6 BLUE/BLACK, #7 ORANGE/BLACK, #8 WHITE, #9 BLACK/WHITE, #10 RED/WHITE
#11 RED, #12 GREEN, #13 GREEN/WHITE, #14 BLUE/WHITE, #15 BLUE**

D
A 1st three Letters = Data Cable
T

0
0
0 2nd five numbers = Print Number
0
0

0
0 3rd two numbers = Configuration

0
0 4th two numbers = Length In Feet

0 5th last digit = Length In Inches