


# R. C. Tronics Incorporated

2573 East Kercher Road  
Goshen, Indiana 46528  
Toll Free 1-866-457-7790

Phone 1-574-642-3857  
Fax 1-574-642-3858  
<http://www.rctronics.com>

## DAT-01345-05XX0 02 Conductor Data Cable

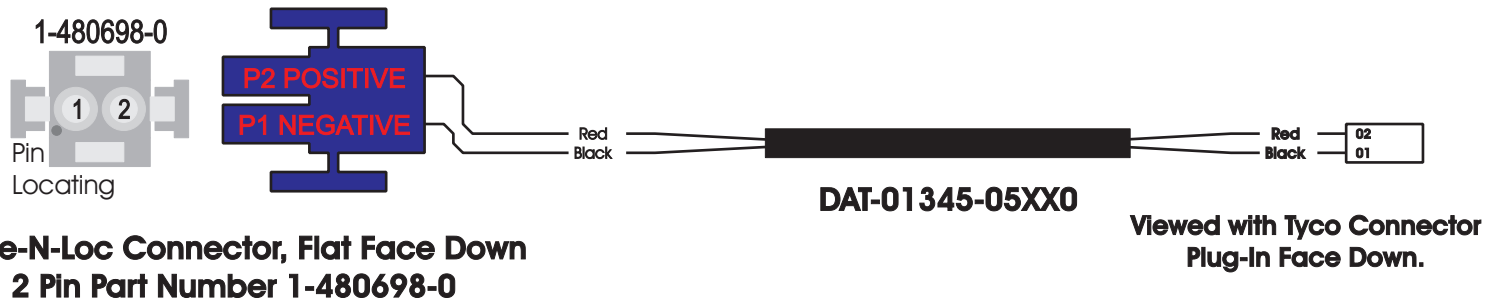

This Data Cable operates "Door Open Indicator" on Micro-line Controllers,  
RCT-01755  
Interfaces with Solico 14 VDC Red Flasher 29XX-1-11-38310

Belden Part Number B-8442

Carol, 22 AWG, Stranded, unshielded two conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires one Tyco/Amp. 643814-3 connector & Tyco/Amp. 643075-3 end cap.

Mate-N-Loc Connector 1-480698-0 Flat face down and insert pins as shown.

#1 BLACK

#2 RED

D  
A  
T  
  
0  
0  
0  
0  
0  
  
0  
0  
  
0  
0  
  
0  
0

1st three Letters = Data Cable

2nd five numbers = Print Number

3rd two numbers = Configuration

4th two numbers = Length In Feet

5th last digit = Length In Inches