


R. C. Tronics Incorporated

**2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790**

**DAT-01349-XXXXX
10 Conductor Data Cable**

**Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>**

Viewed with Tyco Connector Plug-In Face Down.

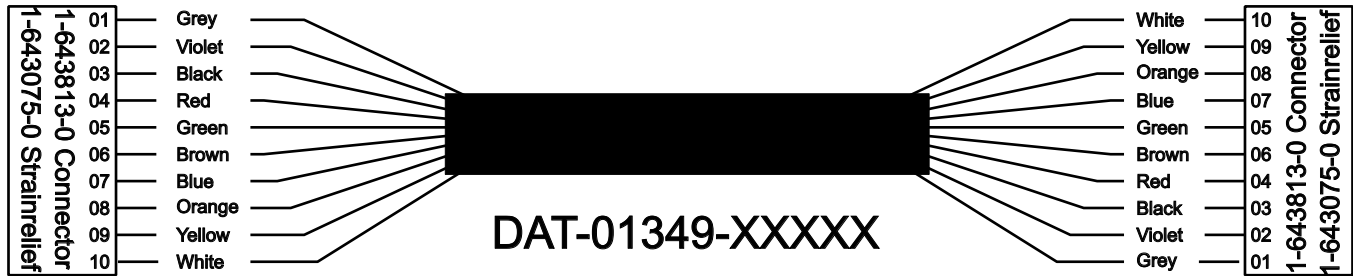

Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd. Shielded ten conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires two (2) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.

Place connector into insertion equipment, start with #10 and complete with #1

CHECK CABLE WITH CABLE CHECKER

#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN

#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE

**D
A
T**

1st three Letters = Data Cable

**0
0
0
0
0**

2nd five numbers = Print Number

**0
0**

3rd two numbers = Configuration

**0
0**

4th two numbers = Length In Feet

0

5th last digit = Length In Inches