


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01758-02XXX
13 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

Viewed with Tyco Connector Plug-In Face-Down.

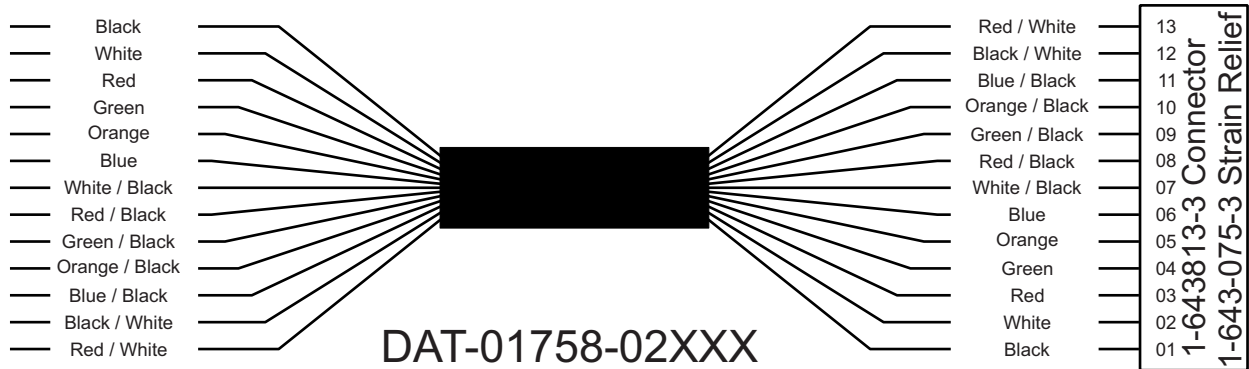

Belden 9541, 24 AWG, Stranded, unshielded fifteen conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires one (2) Tyco/Amp. 1-643814-3 connector & Tyco/Amp. 1-643075-3 end cap.

Place connector into insertion equipment, start with #13 and complete with #01.

CHECK CABLE WITH CABLE CHECKER

**#01 BLACK , #02 WHITE, #03 RED, #04 GREEN, #05 ORANGE
#06 BLUE, #07 WHITE/BLACK, #08 RED/BLACK, #09 GREEN/BLACK,
#10 ORANGE/BLACK#11 BLUE/BLACK, #12 BLACK/WHITE, #13 RED/WHITE.**

D	
A	1st three Letters = Data Cable
T	
0	
0	
0	2nd five numbers = Print Number
0	
0	
0	
0	
0	3rd two numbers = Configuration
0	
0	
0	4th two numbers = Length In Feet
0	
0	5th last digit = Length In Inches