


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

DAT-02021-01XX0 20 Conductor Data Cable

Viewed with Tyco Connector Plug-In Face Down.

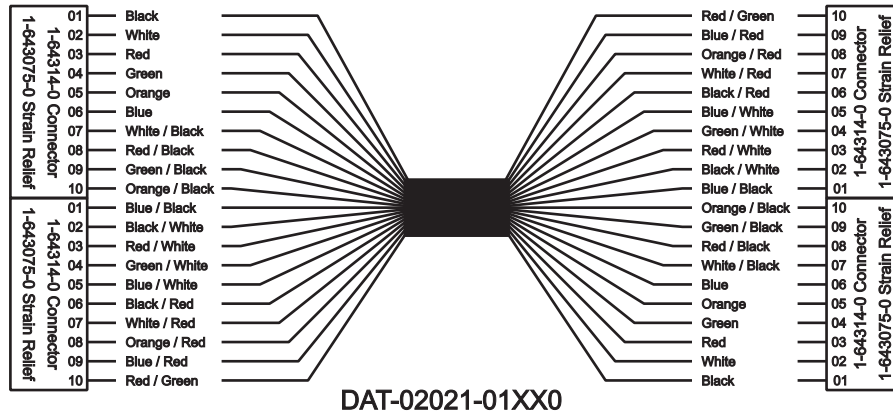

**Belden 9542 or Carol CVA-240720, 24 AWG, Stranded,
Foil 24 AWG Gnd shielded twenty conductor cable.**

Cut each jacket end 4 inches long, remove jacket on each end.

Requires four (4) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.

Cut each jacket end 4 inches long, remove jacket on each end.

**Place connector into insertion equipment, start with #20 and complete with #1
Terminate with .250 female tab on one end only.**

CHECK CABLE WITH CABLE CHECKER

**#1 Black, #2 White, #3 Red, #4 Green, #5 Orange, #6 Blue, #7 White/Black,
#8 Red/Black, #9 Green/Black, #10 Orange/Black, #11 Blue/Black, #12 Black/White
#13 Red/White, #14 Green/White, #15 Blue White, #16 Black/Red, #17 White/Red
#18 Orange/Red, # 19 Blue/Red, #20 Red/Green**

D	
A	
T	1st three Letters = Data Cable
0	
0	
0	2nd five numbers = Print Number
0	
0	
0	3rd two numbers = Configuration
0	
0	4th two numbers = Length In Feet
0	
0	5th last digit = Length In Inches