

R. C. Tronics, Incorporated

SPECIALIZING IN ELECTRONIC CONTROLS

Ultra Bus Power Center RCT-01414-00000

All connections are "Plug-N-Play", power center is easily removed and replaced.

Twenty-four, fuse protected power relays provide 12 VDC @ 30 ampere.

On board warning flasher circuit. May be used for normal load, (switch selectable)

Driver alert with audible alarms for ADA and Passenger Stop Requests.

ADA, Vehicle Secure System, provides output for "Chair Lift" and "Shift Lock".

ADA information panel, displays all inputs and outputs.

Rear Door Unlock, prevents engine start-up if not unlocked.

Switch Center, mounts conveniently in any console.

Visual LED indicators for making trouble shooting a visual event.

Red LED,"Open Fuse"..Amber LED," Relay "On"..Green LED," Power Out.

Four ignition circuit outputs rated 15 ampere each.

Three "Battery Hot" circuits rated 30 ampere each.

Electric door operator with external or selectable internal limits.


Entry Door Open only permitted with "Park". (switch selectable)

"Rear Door Open" warning, silenced with application of "Park Brake".

Dome lights "On" with door open, delayed "OFF" at close.

Information Indicators: Lift Door, ADA Stop, Passenger Stop, Egress Window, Rear Door & Electric Door Open. Laser custom cut face plate panels available and shown separately.

System, Bus Power Center

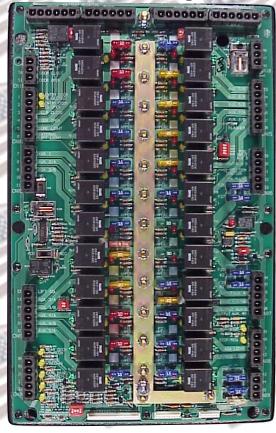



RCT-01255-00203 Coal Black over White Faceplate Shown: Top to Bottom 7.45" Left to Right 7.4"

Additional Items required:
Connector Kit: RCT-Molex-00006

Data Cable: DAT-01352-00070 (30 Conductor Cable 7' length)
Other standard lengths available

RCT-01414-00000, Bus Power Center Control Size: Top to Bottom 16.50" Left to Right 10.5"

R. C. Tronics Can Solve Your Electrical / Electronic Control Needs.